Cambridgeport

SUBMITTAL

SUBMITTED TO _______

COMPANY ______

JOB NAME ______

EQUIPMENT _____


SIGNATURE ______

DATE

ROOF CURBS FOR YORK ROOFTOP UNITS

BHA, BHH, DEB, DEH, DNA, DNH 018-060 BHP, BHQ, BHX, BHZ 024-060 DEM, DEQ, DEX, DEZ, 024-060 DEY 060 DNP, DNQ, DNX, DNY, DNZ 024-060

PART #		PART #	CURB HEIGHT
CAS	YORK	INSULATED	"A"
1000008	1RCO463	1003135	14"
1001802	1RCO449	1004351	8"
1000698	N/A	1004352	18"
1000173	1RCO474	1004353	24"

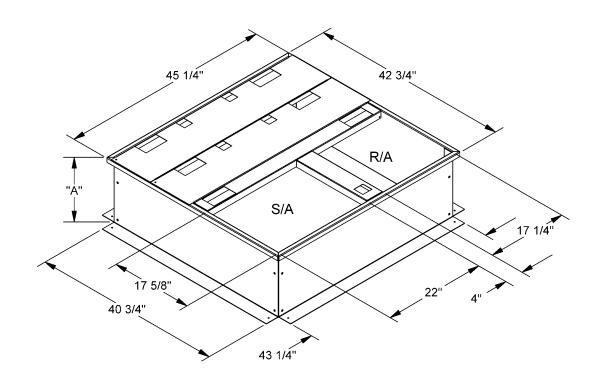

FEATURES

MITERED TOP CORNERS

ROOF CURB IS FABRICATED OF 18GA G90 GALVANIZED STEEL

FULL PERIMETER WOOD NAILER


PRE-PUNCHED ASSEMBLY HOLES AND HARDWARE INCLUDED FOR -

DUCT SUPPORT INSTALLATION

ROOF CURB IS SHIPPED UNASSEMBLED

* CURBS ARE INTERNALLY INSULATED WITH 1" THICK 1-1/2 LB

DENSITY DUCT LINER



08/11 55